

BOULEVARD

General: The Boulevard Bollard's stylish flat rings provide glare control with increased area light for pathways, entrances, etc.

Housing: Cast aluminum tops, lamp chamber, base, etc. Bollard tube from extruded aluminum. All exterior hardware is stainless steel.

Lens: Opal glass lens is standard.

Lamps: Accepts up to 70W MH ED-17 lamps.

Ballast: Electronic ballast mounted to lamp/socket plate for easy maintenance (up to 70W MH).

Finish: Textured polyester powder coat finish. Black, bronze, gray, white, silver, and verde green options available. For custom colors, please contact factory.



Gaskets: EPDM gaskets are standard.

Dimensions: Available in 6" diameter. Standard height is 42"; 30" height option available.

Tops: Four top styles available: beveled, cone, dome and flat.

Mounting: Mount the fixture using the provided mounting template and 1/2" anchor bolt kit (4 bolts).

Listings: UL Listed 1598 for Wet Locations and suitable for mounting within 4' of ground. Indoor/Outdoor listed for use in Canada.

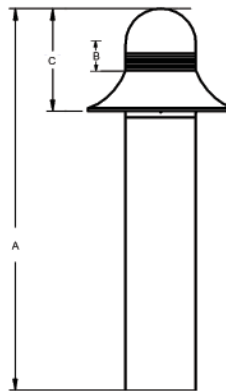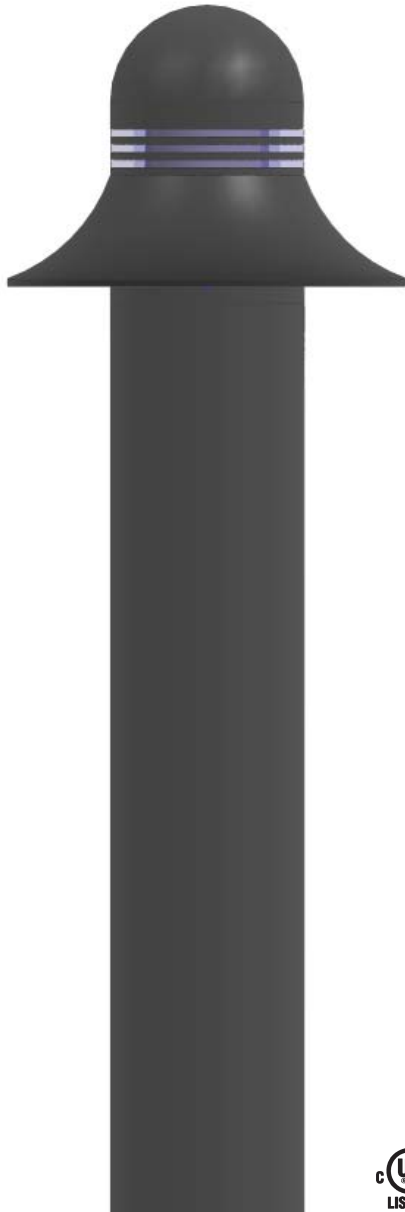

SIZE	TOP STYLE	DIM "A"	DIM "B"	DIM "C"
6"	BEVELED AND FLAT	40" (1016mm)	4.5" (114mm)	8" (203mm)
	DOMES	41" (1041mm)	4.5" (114mm)	9" (229mm)
	CONE	41" (1041mm)	4.5" (114mm)	8" (203mm)

NOTE: STANDARD 42" MODEL DIMENSION. FOR OPTIONAL 30" MODEL, SUBTRACT 12" FROM DIMENSION "A"



PHOTOMETRICS- IN PROGRESS. PLEASE CALL FOR AVAILABILITY

ORDERING INFORMATION

Example	SERIES	DIAMETER (nominal inches)	MOUNT	WATT/ TYPE	TOP STYLE	OPTIONS				
						LENS (opal standard)	ACRYLIC RING (clear standard)	VOLTAGE (ELB standard)	HEIGHT (42" standard) (nominal inches)	FINISH
	BO	6	B	70MH	F	OL	BLU	ELB	30	SIL
	BO	6	B	50MH 70MH	B C D F		BLU RED GRN YLW WHT CLR	347V ELB	30	BLK BRZ WHT VGN GRY SIL CC

Lamp Wattage/Type

50MH = 50W Metal Halide (ED17)
70MH = 70W Metal Halide (ED17)

Mounting

B = Bollard

Top Style

B = Beveled Top
C = Cone Top
D = Dome Top
F = Flat Top

Lens (Opal Lens Standard)

Acrylic Ring (Clear Standard)

BLU = Blue
RED = Red
GRN = Green
YLW = Yellow
WHT = White
CLR = Clear

Voltage

HID: 50W = Electronic ballast standard
70W = Electronic ballast standard
220/240-50H = 220/240V, 50HZ (HID units only)
347V = 347 Volt (70W HID)

Height (42" Standard)

30" = 30" Overall Height

Finish

BLK = Black
BRZ = Bronze
WHT = White
VGN = Verde Green
GRY = Gray
SIL = Silver
CC = Custom Colors
(contact factory)