


vera

PRELIMINARY
PRE-RELEASE COPY



Shown with two luminaires and upper canopies mounted on 5" diameter pole. Luminaires shown are preliminary and subject to change.

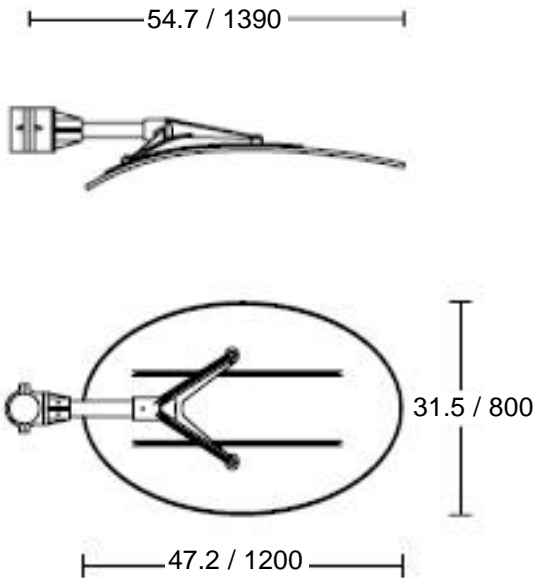

General Description: *Indirect Luminaire.* Direct lamp glare is eliminated by locating the primary reflector in the optical housing. This configuration provides indirect illumination by focusing light onto the white surface above. The result is glare-free, even illumination on the ground below. Appropriate for park and pedestrian illumination.

Construction: Corrosion resistant, marine-grade low copper content construction. Stainless steel hardware. Fiberglass reinforced canopy.

Lens: Flat clear, tempered glass lens.

Optics: Internal primary reflector is located in pole mounted luminaire housing and is anodized, high-purity aluminum.

Lamp: Luminaire includes vertically mounted clear, T6 MH lamp with G12 base. Up to 150w.

Ballast: High power factor electronic ballast is remote mounted beside luminaire and secured to side of pole.

70w CMH: Universal electronic ballast.
150w CMH: 120v or 277v electronic ballast.

Mounting: Pole arm mount. Secures in place with set screws to prevent rotation. Quick disconnect assembly inside pole provides easy wiring of fixture to ballast frame.

Poles: Sold separately. See Phoenix "Pole Specification Guide".

Finish: Textured polyester powder coat finish. Luminaire hub and arms available in black, bronze, gray, white, silver, and verde green. Fiberglass canopy in white only. For custom colors, please contact factory.

Gaskets: Silicone gaskets are standard.


E.P.A = TBD

Weight = TBD

Listings: Designed for UL Listing 1598 for Wet Locations. Indoor/Outdoor listed for use in Canada. UL Listing pending.

ORDERING INFORMATION

PRELIMINARY
PRE-RELEASE COPY

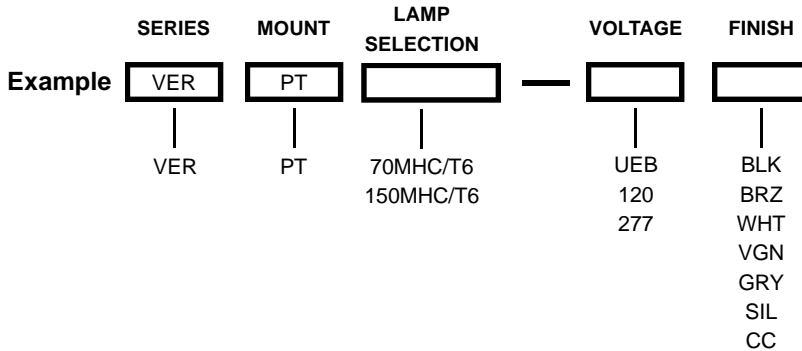

SERIES

VER = vera, Indirect Luminaire

MOUNT

PT = Post Top Mount - Single post top mount

LAMP SELECTION

70MHC/T6 = 70w Ceramic Metal Halide (T6, G12 base)

150MHC/T6 = 150w Ceramic Metal Halide (T6, G12 base)

VOLTAGE

UEB = Universal Electronic Ballast

120V = 120V

277V = 277V

FINISH

BLK = Black

BRZ = Bronze

WHT = White

VGN = Verde Green

GRY = Gray

SIL = Silver

CC = Custom Colors (consult factory)


LAMP AND BALLAST SPECIFICATION NOTES

1 - HID lamps included; standard with high power factor electronic ballast.

2 - 70w MHC/T6 standard with universal UEB 120V-277V 50/60Hz electronic ballast. 150w MHC/T6 specify either 120v or 277v 50/60Hz electronic ballast (universal UEB ballast not available with 150w CMH).

MOUNTING NOTES

1 - Fiberglass reinforced canopy and luminaire are pole mounted to 5" diameter straight pole.

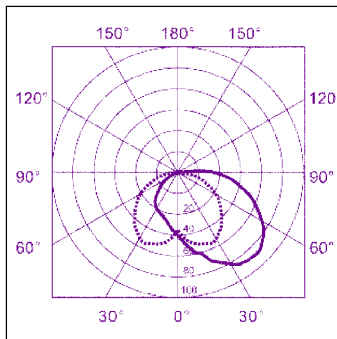

1 x MHC 150w T6
lumen output: 14,000

lwf nov07

PHOENIX
Intrigue
SERIES™

PHOENIX
Durability by Design

8711 West Port Avenue • Milwaukee, WI 53224 USA • Phone: 414-973-3300 • Fax: 414-973-3210

www.phoenixproducts.com