


METRO - Wall Mount

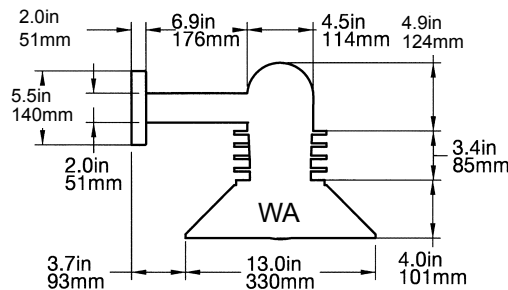

General: The updated contemporary style of the Metro is a popular fixture with good illumination and outlight.

Construction: Cast low-copper content marine grade aluminum top, housing, shade, and mounting gear. Stainless steel external hardware to protect against corrosion.

Lens: Opal glass lens is standard. Clear glass lens available.

Lamps: HID and fluorescent lamps included. Accepts up to 70W MH and 70W HPS lamps, 26-42W compact fluorescent lamps and 150W (max.) incandescent lamps.

Ballast: Integral ballast for easy access and maintenance. 50W MH & HPS units available with 120V or 277V, 60HZ ballast only. 70W MH & HPS units available in 120 to 277V, 60HZ ballast only. Compact fluorescent units available 42W max at 120 to 277V, 50/60HZ electronic ballast.

Tops: One top style available: dome.

Mounting: One wall mount style available: straight arm.

Finish: Textured polyester powder coat finish. Shade underside is standard with white finish. Black standard on housing exterior. Bronze, gray, white, silver, and verde green options available. For custom colors, please contact factory.

Gaskets: EPDM gaskets standard. Silicone O-ring used for lens.


Weight: 15lbs.

Listings: UL Listed 1598 for Wet Locations. Indoor/Outdoor listed for use in Canada.


LARGE VERSION OF FIXTURE AVAILABLE FOR POLE OR WALL MOUNT APPLICATIONS
CORRESPONDING BOLLARD AVAILABLE

PHOENIX
Intrigue
SERIES™

PHOTOMETRICS

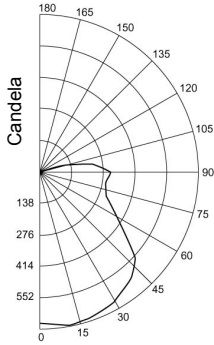

MTWA70MH*
70W Medium Base MH
NEMA Type: 7x7
Lumens - 9000
* Insert Top Style

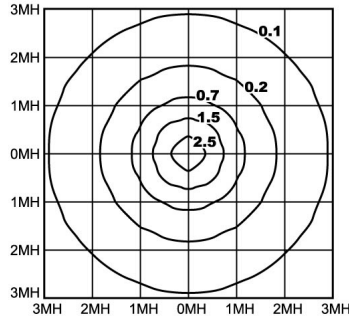

MTWA70MH*
70W Medium Base MH
Lumens - 9000
* Insert Top Style
Mounting Height = 15'

For mounting heights (MH) other than 15' use:

$$\left(\frac{15}{\text{Actual Height}}\right)^2 \times \text{FC chart value}$$

For lamp watts other than shown in chart use:

$$\left(\frac{\text{Actual Lumens}}{9000}\right) \times \text{FC chart value}$$

FC = Footcandle

ORDERING INFORMATION

Example	SERIES	MOUNT	WATT/ TYPE	TOP STYLE	OPTIONS		
					LENS <small>(opal standard)</small>	VOLTAGE <small>(see below)***</small>	FINISH <small>(black standard)</small>
	MT	WA	50MH	D	CL	347V*	BRZ
	MT	WA	70MH	D	CL	347V*	WHT
			50HPS				VGN
			70HPS				GRY
			INC				SIL
			26CFL				CC
			32CFL				
			42CFL				

*Incandescent and 70W MH & HPS Only

Mounting

WA = Straight arm wall mount

Lamp Wattage/Type (Lamp Included, except INC)

50MH = 50W Metal Halide (ED17)
70MH = 70W Metal Halide (ED17)
50HPS = 50W High Pressure Sodium (ED17)
70HPS = 70W High Pressure Sodium (ED17)
INC = Incandescent (150W max.) (Med Screw Base)
26CFL = 26W Compact Fluorescent (triple, 4-pin)
32CFL = 32W Compact Fluorescent (triple, 4-pin)
42CFL = 42W Compact Fluorescent (triple, 4-pin)

Top Style

D = Dome Top

Lens (Opal Glass Standard)

CL = Clear Glass Lens

***Voltage

HID: 50W MH & HPS 120 or 277V
70W MH & HPS 120 to 277V
CFL: 120 to 277V 50/60Hz

Finish (Black Standard)

BRZ = Bronze
WHT = White
VGN = Verde Green
GRY = Gray
SIL = Silver
CC = Custom Colors
(contact factory)

N5610355C

PHOENIX
Durability by Design

8711 West Port Avenue • Milwaukee, WI 53224 USA • Phone: 414-973-3300 • Fax: 414-973-3210
www.phoenixproducts.com

PHOENIX
Intrigue
SERIES™