

POLE SPECIFICATION FORM (FOR NON-STANDARD POLES)

Phoenix Base Style:

PA1 _____
 PA2 _____
 PA3 _____
 PA4 _____

Mounting Height: _____
 Diameter at Top: _____
 Diameter at Base: _____
 Wall Thickness: _____

Fixture Mounting Type:

S3A (Straight Arm) _____
 SCM (Shepherds Crook Side Mount) _____
 PTM (Post Top Mount 2-3/8" tenon) _____

SPT (5" dia. Open Top (no tenon) only) _____
 SSA (5" dia. EuroTech Arm Mount only) _____

Fixture Quantity and Configuration (indicate number poles for required configuration):

Single (D) _____
 Double @ 180° (B,D) _____
 Triple @ 120° (F,D,E) _____
 Quadruple (A,B,C,D) _____
 Double @ 90° (C,D) _____
 Triple @ 90° (A,D,C) _____
 Double @ 120° (D,E) _____

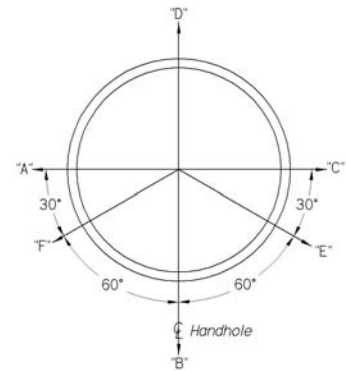


diagram 1

Finish:

Black: _____ Verde Green: _____
 Bronze: _____ Gray: _____
 White: _____ Silver: _____
 Custom Color: _____

Options:

Tenon Top: No _____ Yes _____

GFI Convenience Outlet: No _____ Yes _____ If YES:

Color: _____. Plug Type: Straight plug _____ Screw In _____.

Please check one:

- ____ Phoenix standard location 90° from ("C" from diagram 1) and 12" above center of handhole.
- ____ Non-standard Location: height up from bottom of base casting _____.

Banner Arms: Yes/No _____ If yes, please indicate orientation with respect to hand hole _____
 Banners per Pole _____ Banner Size _____ x _____
 Fixed Arm or Breakaway Arm _____ If Breakaway, arm will attach with stainless steel bands.
 How attached: Top only or Top and Bottom: _____
 Vertical location (Height from top of pole) _____

Flag holders, and flower basket holders are available upon request. These items also require location with relation to the hand hole and height up from the base or down from the top. Contact the factory for further information.

