
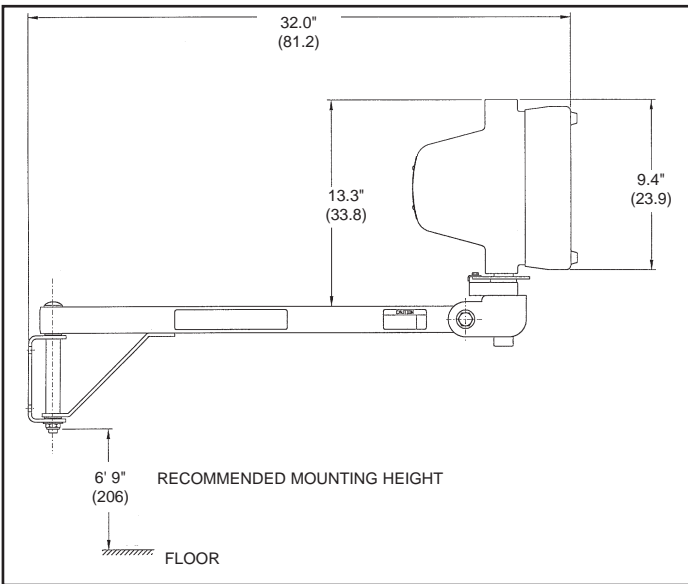


# DLX SERIES

Explosion-proof Task Light

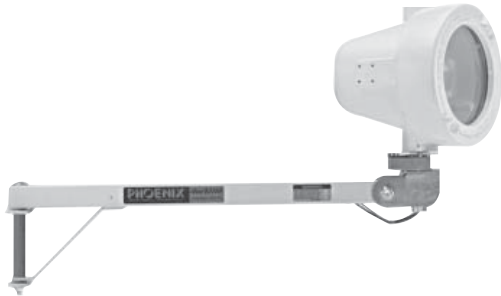

**FIXTURE WEIGHT:** 25-28 lbs (11.4-12.8 kg)

**DESCRIPTION:** The *DLX Series*, Explosion-proof models, are ideal for task lighting in hazardous environments, including Class I, Division 1 areas. Available with incandescent, high pressure sodium, and metal halide heads.

## SPECIFICATIONS

**Housing:** Shell and cover are corrosion-resistant copper-free cast aluminum with thermoset powder-coated safety yellow finish.

**Lamps:** Accepts ED-17 high pressure sodium lamps up to 150W, incandescent PAR or R lamps up to 150W, and 70W double-ended metal halide lamps.

**Wiring:** 6' (1.83 m) of wire to be used in compliance with suitable methods defined in the NEC for Class I, Division 1 locations. Wire entrance is factory sealed.

**Arm:** 26" swing arm made from 1.5" square steel tube with a thermoset powder-coated safety yellow finish. Swings horizontally up to 180°.

**Joints:** Threaded joints between shell and cover permit internal pressure to be dissipated and provide a cooling path for escaping gases.

**Ballast:** Integral ballast minimizes installation and maintenance time (HID models).

**Lens:** 3/4" thick tempered glass lens resists thermal shock and impact damage.

**Reflector:** Aluminum specular finish reflector permits exact direct beam pattern.

**Head:** Head rotates up to 230° horizontally and up to 74° vertically.

## COMPLIANCES



**UL 1572 & UL 781 Listed**

**UL 844 Listed:** Suitable for Hazardous Locations Class I, Division 1, Groups C&D Class II, Division 1, Groups F&G\* Class III\*

**UL 1598A Listed:** Marine Type Electric Fixture Outside type (Saltwater)



**CSA Certified:** Type 4

\*Exceptions noted in ordering information.

## 3 YEAR WARRANTY

A three-year limited warranty against defects in material and workmanship. See Standard Terms and Conditions for details.

# PHOENIX®

