


PHOENIX[®] DWT SERIES

Wet-Location Task Light

DESCRIPTION: The *DWT Series* is a Wet-Location model that's ideal for use outdoors or in wet indoor environments. Available with incandescent, high pressure sodium, and metal halide heads.

docklite[®]

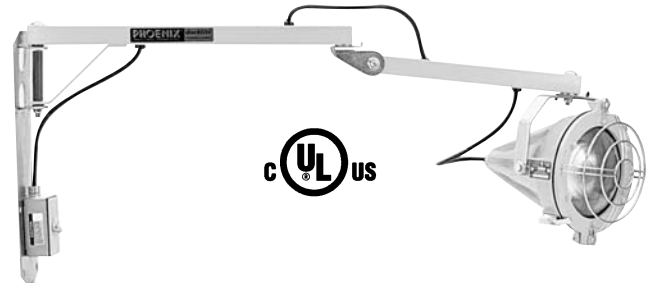

SPECIFICATIONS

- **HOUSING:** Rugged, cast aluminum housing is copper-free for greater corrosion resistance; thermoset powder-coated seals out the elements.
- **HARDWARE:** Zinc-plated steel hardware resists corrosion.
- **TWIST GUARD:** Limits head rotation to prevent cord tangling.
- **TOUCH CONTROL:** Vertical and horizontal positioning of head.
- **LAMPS:** Accepts medium screw base R-40 and PAR38 incandescent type lamps to 300 watt maximum. 70 watt HPS and MH ED17 lamps, and 70 watt double-ended MH lamps.
- **LENS:** Tempered glass lens and wire lens guard standard.
- **WIRING:** 3-conductor grounded cord from fixture to switch on wall bracket with weather-tight fitting that seals out moisture around cord.

- **SWITCH:** Pre-wired weather-proof switch included.
- **ARMS:** 1 1/2" square steel tube arms with wrist-action joint available in 42", 60", or 90" reach.
- **RELAMPING:** Two easy-open snap clips and hinged door for tool free relamping.
- **EPDM GASKET:** Silicone gasket seals out dirt and moisture.

3 YEAR WARRANTY

A three-year Limited Warranty against defects in material and workmanship. See Standard Terms and Conditions for details.

ORDERING INFORMATION

SERIES	WATT/TYPE	PART	LENGTH	OPTIONS (120V Standard)
DL	INC	DWT	42	277
DL	INC 70MH/DE 70HPS 70MH	DWT	42 60 90	277'

WATTAGE/TYPE

INC = Incandescent (PAR38/BR40; 300W max.)
 HPS = High Pressure Sodium
 MH = Metal Halide
 MH/DE = Metal Halide/Double-Ended

PART

DWT = Docklite Weather-Tight


LENGTH

42 = 42" Arm
 60 = 60" Arm
 90 = 90" Arm

OPTIONS

277V = 277 Volt
 *Available on HPS and MH models only.
 120 Volt standard.

DIMENSIONS

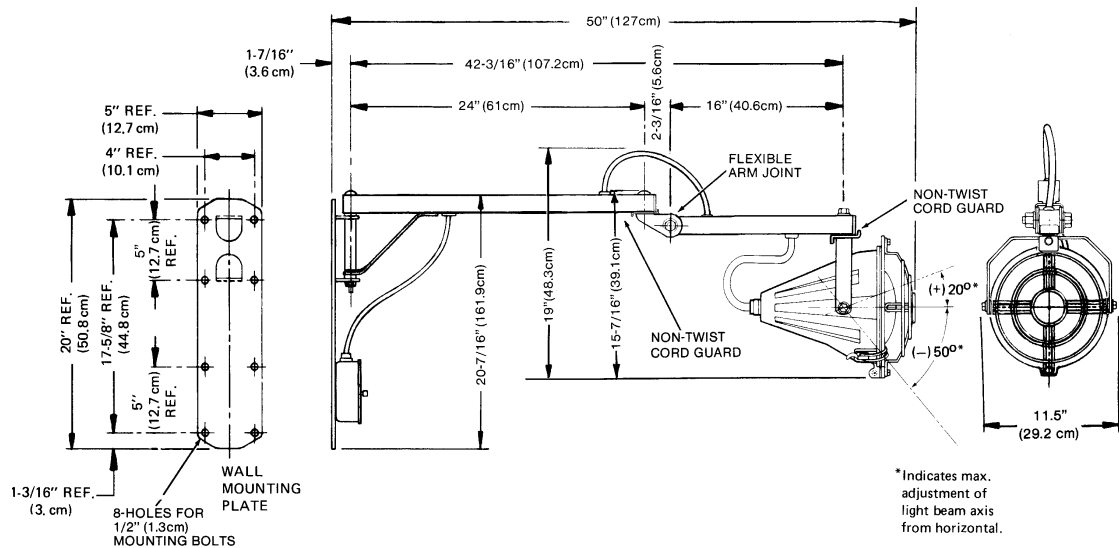

LAMPING DATA

Light Head	Type	Watts	Bulbs	Base	Phoenix Part Number	Amp Draw	
						120V	277V
INC	Incandescent/Halogen PAR	Up to 300	Par 38/BR40	Med. Skt./Med.	4220043 (QH90PAR) 4220044 (QH250PAR)	2.50	NA
70MH	MH/DE	70	T6	RSC	4220028	2.10	1.08
70 HPS	High Pressure Sodium	70	ED 17	Med.	4212600	2.50	1.20
70 MH/DE	Metal Halide	70	ED 17	Med.	4220031	2.95	1.30

SAMPLE SPECIFICATION

Wet location task light. Accepts medium screw base R-40 and PAR 38 incandescent type lamps to 300 watt maximum. 70 watt HPS and MH ED17 lamps, and 70 watt double-ended MH lamps. UL Listed. Meets Standard 1571 or 1572 - Suitable for Wet Locations. CSA Certified. Copper-free, cast aluminum housing and heavy gauge steel arm, both thermoset powder-coated. Steel wall mounting bracket. Weather-proof power switch included. Zinc-plated steel hardware. Non-twist cord. Dual swing arms (42", 60", or 90" reach). Glass lens and wire lens guard standard. Silicone gasket.

TECHNICAL DATA

- **WIRING:** 3-conductor grounded cord from fixture to switch on wall bracket with weather-tight fitting that seals out moisture around cord.
- **WEIGHT IN POUNDS (kg):**

	42"	60"	90"
Incandescent	30(13.6)	36(16.3)	46(20.9)
MH and HPS	36(16.3)	42(19.1)	52(23.6)
- **COLOR:** Safety Yellow

COMPLIANCES



UL 1571 Listed: Suitable for wet locations.
UL 1572 Listed: Suitable for wet locations.



CSA Certified: Indoor/Outdoor
NRTL: UL 1571 or UL 1572
Suitable for Wet Locations

N5610185E