


LFBM SERIES

Indoor Fluorescent



Half cut-out lens shown

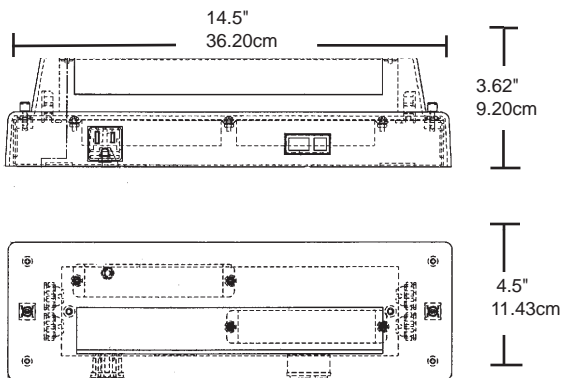

Weight: 2.72 lbs
1.24 kgs

DESCRIPTION: The *LFBM Series* is an interior below-deck fluorescent fixture suited for berth/mirror lighting.

SPECIFICATIONS

Housing: Corrosion-resistant, Marine grade low copper content aluminum alloy.

Cover: White ABS material.

Diffuser: Clear ribbed acrylic half cut-out lens standard.

Hardware: All external hardware is stainless steel.

Ballast: Normal power factor 120V 60Hz is standard. Class P.

Convenience Outlet: 120V 3-wire convenience outlet with ground is standard.

Switch: Single pole rocker momentary contact type.

Reflector: Marine grade low copper content aluminum alloy with high reflectance white powder coat finish.

OPTIONS

- Other voltages and 50Hz are available
- Less convenience outlet
- Mirror lens cover
- Prismatic lens
- Ribbed lens

COMPLIANCES

UL 1598A Listed - Marine Type Electric Fixture
Inside Type

US Coast Guard Accepted


cUL Listed for use in Canada



N-5610296C

PHOENIX®

ORDERING INFORMATION

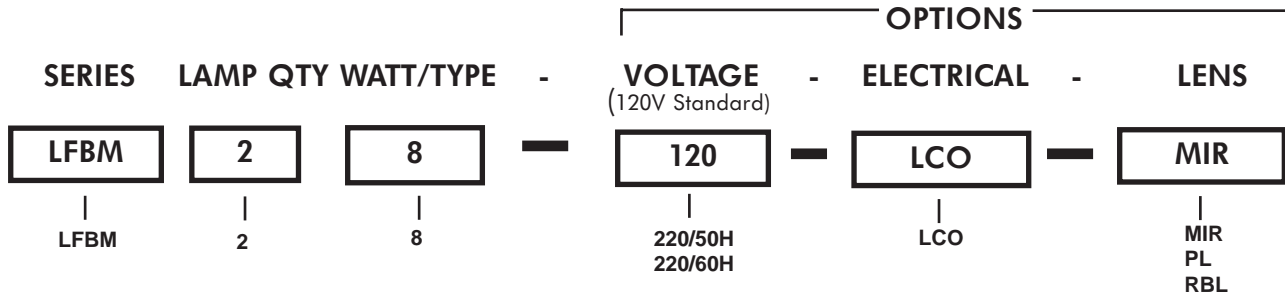

WATT/TYPE

8 = F8 T-5
(Mini Bi-pin)

VOLTAGE OPTIONS

(120V Standard)
220/50H = 220 Volt; 50Hz
220/60H = 220 Volt; 60Hz

ELECTRICAL OPTIONS

LCO = Less Convenience Outlet

LENS OPTION

MIR = Mirror Lens (prismatic, full cutout)
PL = Prismatic Lens (adder for half cutout style only)
RBL = Ribbed Lens (adder for mirror/full cutout style only)

LAMPS NOT INCLUDED

N-5610296C

PHOENIX®