


LFB SERIES

Indoor Fluorescent

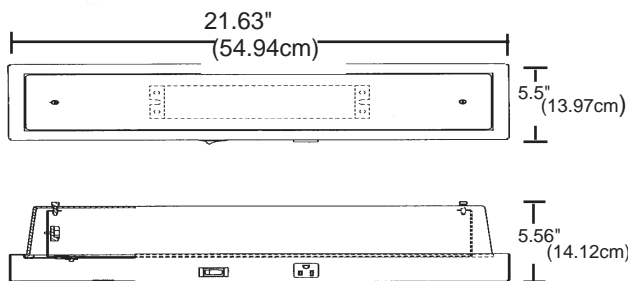

Weight: 7 lbs.
3.18 Kgs

DESCRIPTION: The *LFB Series* is an interior below-deck fluorescent fixture used for berth/mirror lighting.

SPECIFICATIONS

Housing: Copper-Free marine grade aluminum alloy.

Finish: Thermoset polyester white powder coat finish.

Diffuser: Clear prismatic acrylic diffuser standard.

Hardware: All external hardware is non-magnetic stainless steel.

Ballast: Integral ballast is H.P.F. Class P, 120 volts, 60Hz.

Convenience Outlet: 120 volt convenience outlet supplied.

Switch: Single-pole rocker switch supplied.

OPTIONS

- Low-temperature ballast
- Non-standard voltages
- Double-pole switch
- Terminal block
- Without convenience outlet

COMPLIANCES

UL 1598A Listed: Marine Type
Electric Fixture
Inside Type


Meets US Coast Guard Requirements



N-5610162D

PHOENIX®

ORDERING INFORMATION

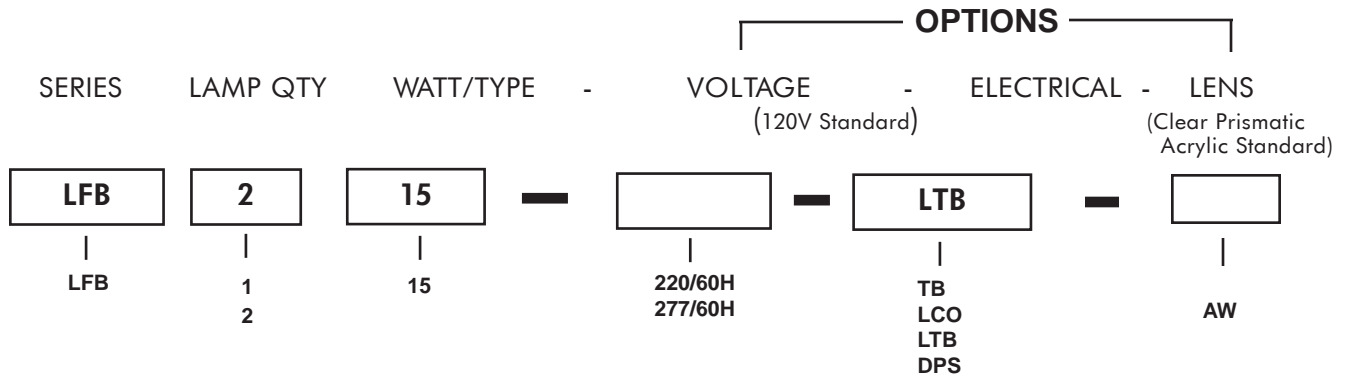

WATT/TYPE

(lamp not included)
F15T8 (15 watt, 18"(42.7cm), Med Bi-Pin)

VOLTAGE OPTIONS

(120V Standard)
220/60H = 220 Volt; 60Hz
277/60H = 277 Volt; 60Hz

ELECTRICAL OPTIONS

TB = Terminal Block
LCO = Less Convenience Outlet
LTB = Low Temperature Ballast
DPS = Double Pole Switch

LENS OPTION

AW = Acrylic White Diffuser

N-5610162D

PHOENIX®