


# MRSF/SRSF SERIES

## ROUGH SERVICE FLUORESCENT

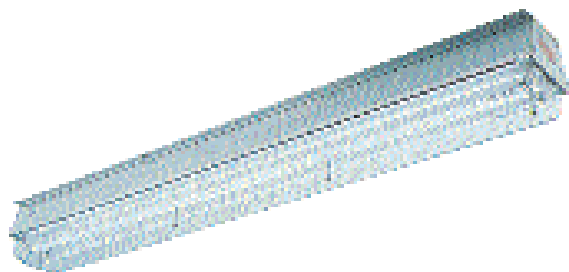

**DESCRIPTION:** The *MRSF and SRSF Series* are both two lamp rough-service fluorescent fixtures designed to withstand the severe shock and vibration inherent in heavy machinery applications. The MRSF Series specifically targets Marine service applications. The SRSF is for non-marine demanding applications and can be mounted indoors or out.

### SPECIFICATIONS

**Construction:** Housing and end plates are marine grade aluminum extrusion. All external hardware is stainless steel.

**Lamps:** Lamp holders are spring loaded on one end of the MRSF, and spring loaded at both ends on the SRSF for shock and vibration resistance. Lamps not Included.

**Finish:** The SRSF finish is natural aluminum, the MRSF is white thermoset polyester powder coat.

**Lens:** Diffuser is clear UV stabilized polycarbonate for high impact resistance in harsh environments. Diffuser and reflector/ballast cover are captive for easy maintenance.

**Mounting:** Surface or Wall Mount using four 3/8" (not included) screws through holes in mounting in feet.

### OPTIONS


- 5 foot cord and plug. (Not UL Listed)

### COMPLIANCES

**SRSF:** UL 1598 Compliant, suitable for wet locations  
CSA certified Indoor/Outdoor surface mounted applications



**MRSF:** UL 1598A - Marine Type Inside Dripproof

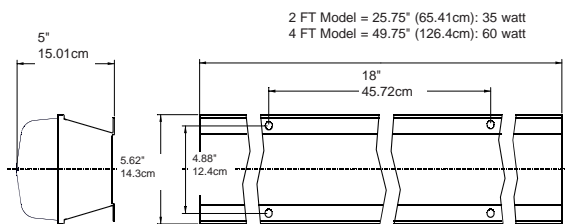

Weight: 2 FT. Model - 13 lbs (5.9 kg)  
4 FT. Model - 18 lbs (8.2 kg)

# PHOENIX®

# PHOTOMETRICS

Contact Phoenix Products Company for Photometric Information.  
Or visit our Website at [www.phoenixproducts.com](http://www.phoenixproducts.com)

## ORDERING INFORMATION

\*\*\* PLEASE NOTE: NOT ALL COMBINATIONS LISTED BELOW ARE AVAILABLE. CONTACT FACTORY WITH ANY QUESTIONS

	SERIES	WATT/TYPE	VOLTAGE	OPTIONS
<i>example:</i>	SRSF	60	120	5C
	SRSF MRSF	35 60	120 220** 277	5C*

### Wattage/Type Lamps not Included

35 = T12 HO (RDC, 2')  
60 = T12 HO Lamp (RDC, 4')

### Voltage Options

120 Volt 60 Hz Standard  
220 Volt = 220 Volt, 50 Hz\*\*  
277 Volt = 277 Volt, 60 Hz

### Options

5C\* - 5 ft. cord and plug  
(Not UL Listed)

\* Not UL Listed

\*\* UL Listed Only